



MAXIMUM LOAD UNTIL 133 KG/M

INTENSIVE USING

CUSTOMISATION OF END FITTING AND CONNECTORS IN OPTION


TECHNICAL FEATURES :

- Asynchronous motor
- Aluminium bi-tapered tube
- Oil bath life lubrication
- Plastic end fitting
- Lifespan : 10,000 hours
- Thermal cut-out 155°C
- Class F insulation
- IP66 protection
- S3 service classe
- 1 m cable length
- Working temperature : -20°C to 85°C



OPTIONS AVAILABLE ON DEMAND :


- Other tube shape
- Cable length
- Connector
- End fitting
- Three phase version
- Voltages and frequencies on request

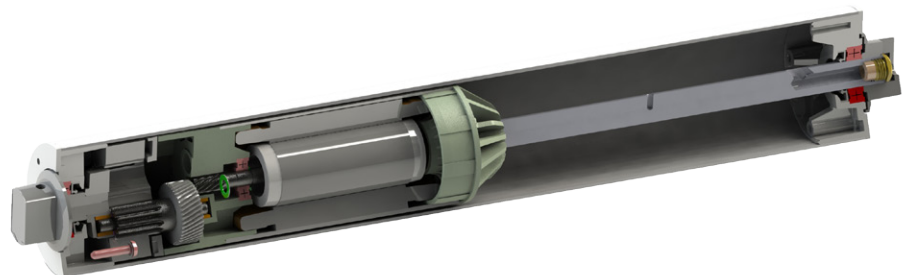

COMPLY WITH STANDARDS :

- EN 60335-1
- EN 60034-1

DIMENSIONS

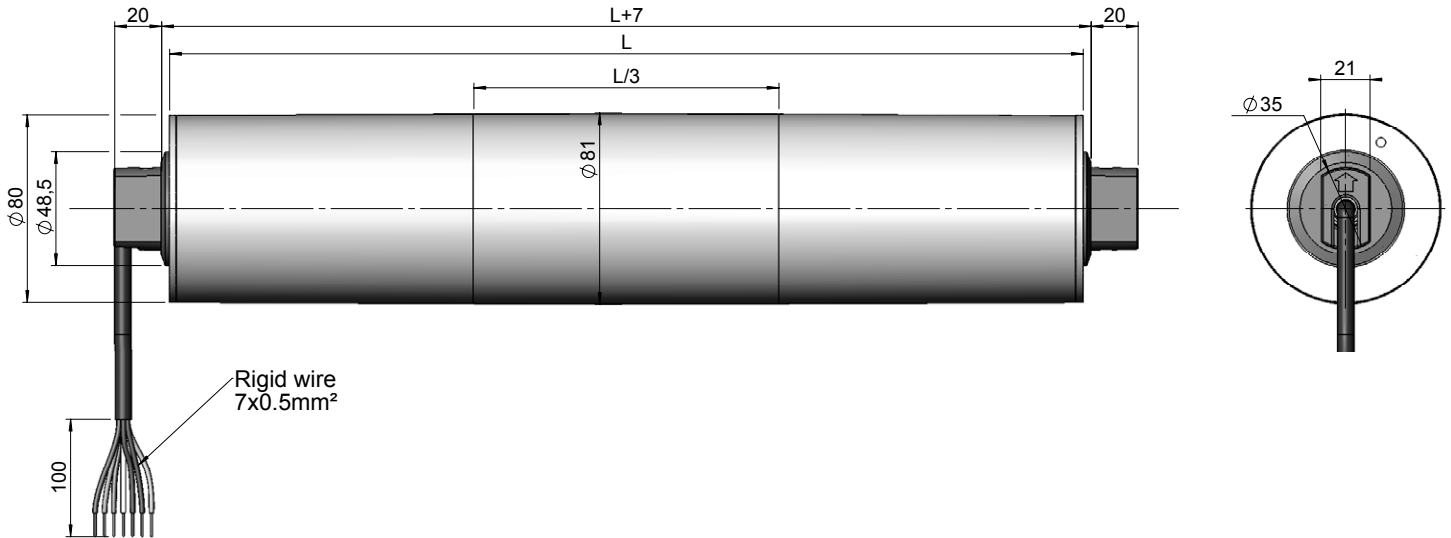

TECHNICAL FEATURES

Ø80 mm Reference	Output power (W)	Linear speed		Reduction ratio	Torque (Nm)	Maximum load (kg)	Tractive effort (N)	Service class	Capacitor (μF)	Intensity under 230v (A)	Available length (mm)
		m/s	m/min								
Moteurs monohasés 230V - 50Hz											
RL 080	85	0.11	6.8	1/50	27.5	133	679	S3 50% of 6s	6	1	Mini : 328 Maxi : 600
	85	0.14	7.8	1/43.3	23.8	115	588		6	1	
	85	0.16	8.7	1/39	21.5	105	530		6	1	
	85	0.19	11.3	1/30	16.5	80	408		6	1	

ELECTRICAL DIAGRAMS

