



VERTICAL PUMP WITH IMMERSED BODY > 0,5 BAR
PUMP BODY IN ALUMINIUM
ASYNCHRONOUS MOTOR

APPLICATIONS :

- Lubricating oils
- Printing ink
- Hydrocarbons

TECHNICAL FEATURES :


- Asynchronous motor
- Open impeller
- Pump body in aluminium AS13
- Deflector (motor protection in case of leak)
- Single or three phase
- Immersed length : 170 mm
- Class B insulation
- IP44 protection
- Operating temperature : -20°C to +150°C

OPTIONS AVAILABLE ON DEMAND :

- Voltages and frequencies
- Classe F insulation
- IP55 protection
- Stainless steel screws assembly
- Reinforced silicone tube
- Other immersed length
- Motor housing with anti-corrosion protection

COMPLY WITH STANDARDS :

- EN 60335-1
- EN 60335-2-41

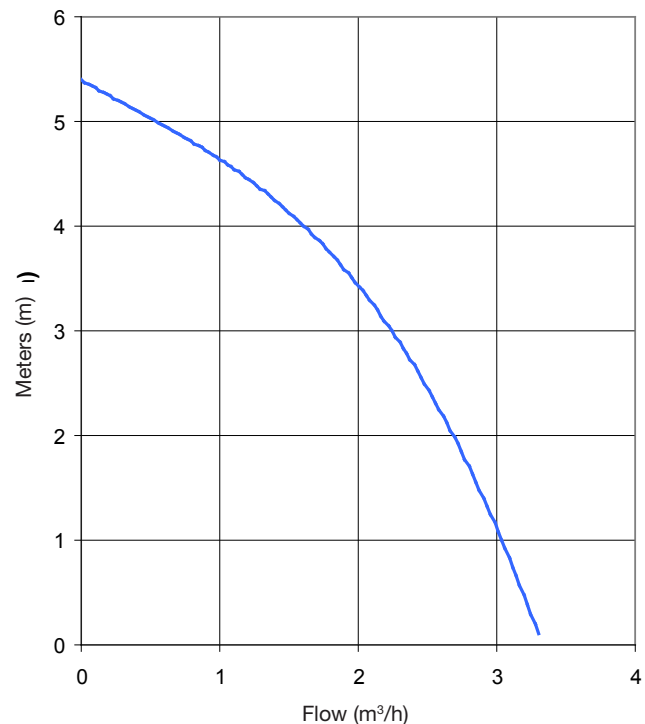

Type	Designation	Inlet power (W)	Outlet power (W)	Power supply 230V - A	Cos φ	Weight (Kg)
Single phase 230V- 50hz	PB 1C 225 FB	162	85	0.71	0.99	3.3
Three phase 230/400V - 50 Hz	PB 3 225 FB	129	66	0;41	0.79	3.3



DIMENSIONS

